

Agema Open Networking Platform AGC7648A

Designed for deep buffered Data Center and granular traffic management Carrier applications, Agema AGC7648A bare-metal switch provides high-density low latency 10GbE SFP+ connectivity for downlinks while also providing 6x100GbE QSFP28 uplinks all in a resilient package making it ideal for Service Provider (CORD, Provider Edge, Mobile Backhaul) and Data Center TOR/Spine/DCI deployment.

The AGC7648A is configured with 48 x 10GbE SFP+ ports and 6 high bandwidth 100GbE QSFP28 Uplinks. The device is pre-loaded with ONIE (Open Network Install Environment) ready to support the customers choice of modular extensible Network Operating Systems (NOS) benefiting users to achieve future proof SDN/NFV capable solutions, network scalability, flexibility and cost effectiveness. It delivers 800Gbps of switching fabric with integrated deep buffers and provides 1+1 resilient power in a very compact 1RU chassis.

High Bandwidth


As bandwidth-intensive applications such as Web 2.0, virtualization, High Performance Computing (HPC) and Network Attached Storage (NAS) continue to proliferate within data centers, 100GbE provides a cost effective way to increase throughput and seamlessly deliver customer service level agreements.

High Availability

The AGC7648A has two slots for hot-swappable PSUs (Power Supply Units) and 4 fan trays. QSFP28 Transceiver modules can be easily removed and replaced with no interruption to the network. These hot-swappable modules guarantee the continued delivery of essential services.

Key Features

- 1RU high-density 48x10G + 6x40/100GE.
- Up to 800Gbps of switching I/O bandwidth with deep buffers to support lossless network applications.
- Support for open automated configuration and zero-touch provisioning capabilities simplify the management of network environments.

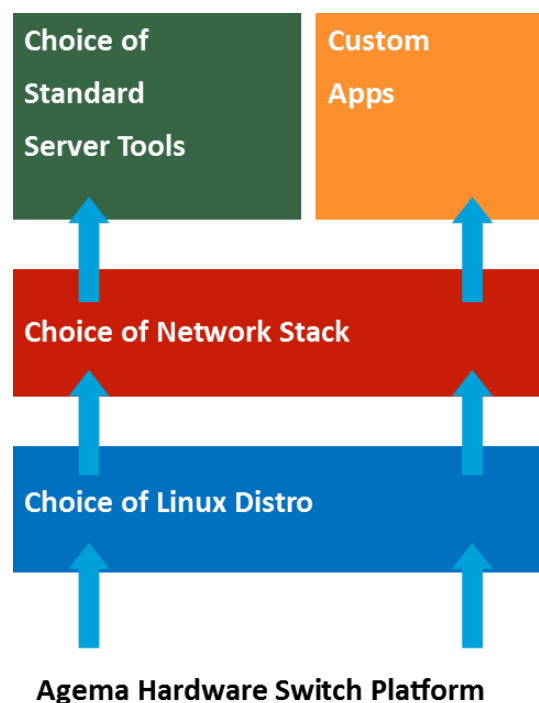



Technical Specification

Ordering Information	Physical	Regulatory Compliance	Performance
6 x 40/100GbE QSFP28 ports 48 x 10GbE SFP+ ports 1 Serial console ports 1 10/100/1000M RJ45 OOB Management port 1 USB 2 slots for PSUs 4 slots for fans Power Supplies & Fans 2 Hot-swappable AC power supply (shipped with single PSU) 4 Hot-swappable FAN tray Options: <ul style="list-style-type: none"> Bare Metal Only Fixed Configuration 	6 x 100GbE QSFP28 48 line-rate 10GbE SFP+ 1 USB 2.0 port 1 Serial console ports 1 RJ45 OOB Management Port CPU: Intel Rangeley C2538 32GB SSD 8GB DDR3 16MB SPI-Flash Dimension (WxDxH): 438.5x460x43.5mm Weight: 8.28kg Power supply: 100–240 VAC 50/60 Hz Max. power consumption: 800 Watts Operating temperature: 0 to 40°C Operating relative humidity: 10 to 90% RH	Safety: EN 60950-1, UL/CSA 60950 -1, IEC 60950-1, CCC Emissions: AS/NZS CISPR 22: Class A, ICES-003, Issue Class A, EN 55022: Class A, VCCI Class A, FCC CFR 47 Part 15, Subpart B Class A, CCC Immunity: EN 300 386, EN55024, EN 61000-3-2, EN 61000-3-3, EN 61000-4-2, EN 61000-4-3, EN 61000-4-5, EN 61000-4-6, EN61000-4-8, EN61000-4-11 EU RoHS Compliant	Packet Buffer: 4GB GDDR5 External TCAM - 2M Records Switch Fabric Forwarding Bandwidth: 800 Gbps Support Jumbo frames up to 16K IEEE1588, SyncE (Optional) Forwarding Table Sizes: contact Agema Sales

Software Specification

- ONIE Pre-installed
- Zero Touch Provisioning via DHCP



©2017. All Rights Reserved. Information in this document is subject to change without notice.
 Delta Electronics, Inc. assumes no responsibility for any errors that may appear in this document.

More product information, please visit www.agemasystems.com

To learn more about Delta, please visit www.deltaww.com